

Aluminum Panel

Raised Floor Panel

Monitor. Integrate. Alert. Peace of Mind.


Applications

Open area airflow panels are designed to provide maximum airflow distribution that fits into most raised floor systems.

Contact RLE to ensure a personalized fit for your facility.

Key Features

- 55% open area
- Grate design
- Powder coat finish
- Imperial sizing 24" x 24" (610mm x 610mm)

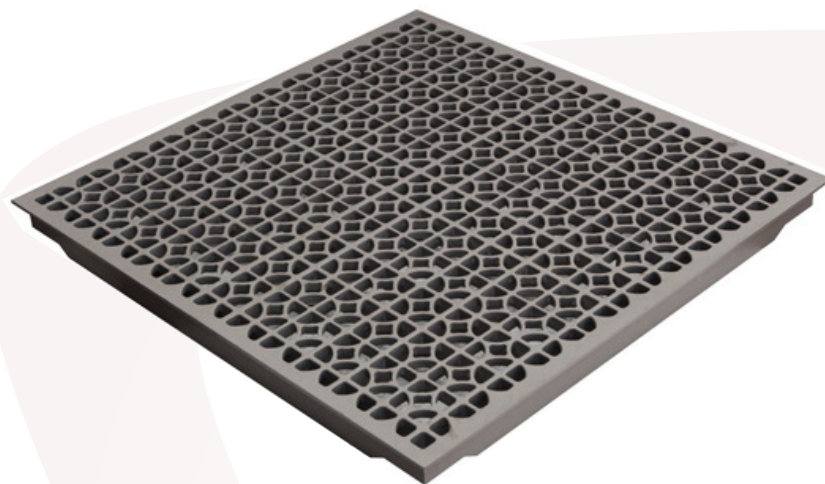

Cost Effective Airflow Solutions For Every Facility


The Triad die-cast aluminum panel is RLE's most economical option, is designed to fit into most common flooring systems.

What Sets RLE's Aluminum Panel Apart?

- Lightweight
- In-stock and ready to ship allowing for quick turnaround
- Our most economical option
- Load Rating up to 1,250 pounds

Cast Aluminum Panel • Compatible with most new and existing raised floor systems

| Product Codes | |
|---------------|--|
| 1250AL-55-GFT | Cast Aluminum panel; Imperial sized (24" x 24"); 1250 lbs load rating; grey flek powder coat |
| 1250AL-55-CWT | Cast Aluminum panel; Imperial sized (24" x 24"); 1250 lbs load rating; crystal white powder coat |

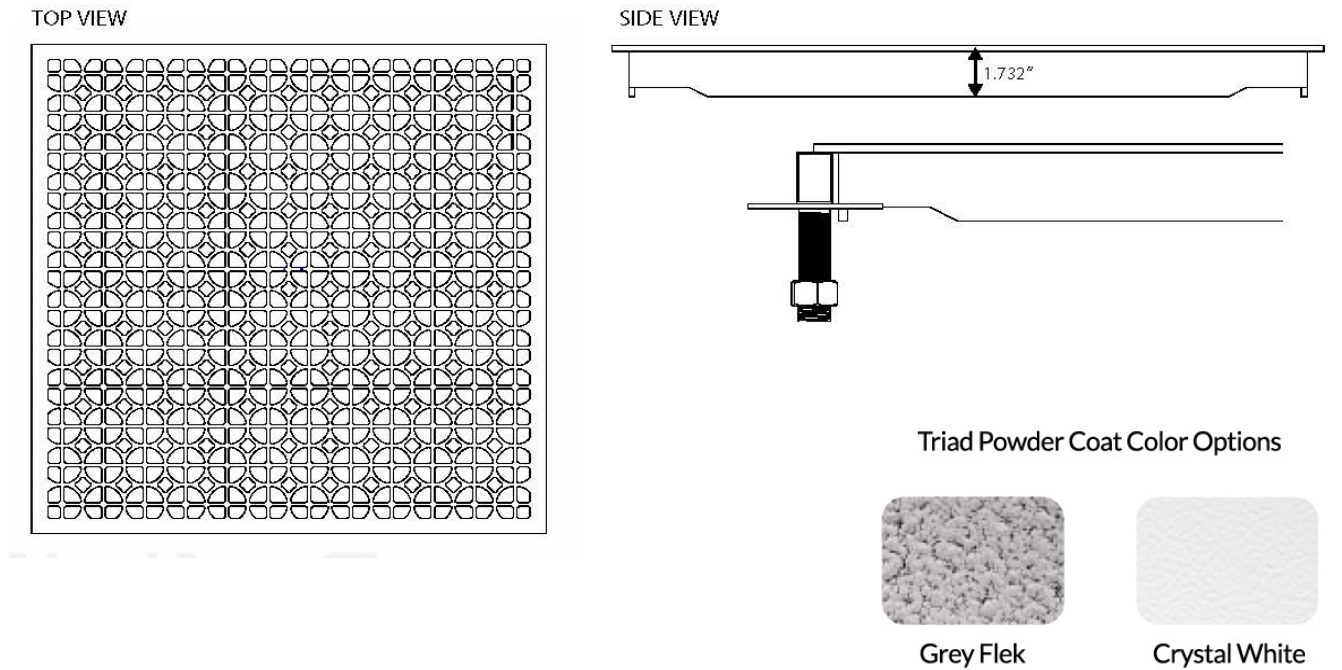

These color samples are representative only and will vary from the actual color depending on the computer monitor or printer used to view them. Contact RLE for accurate color, gloss and texture sample.

| Technical Specifications | |
|--------------------------|---|
| Style | Perferated |
| Composition | Cast Aluminum |
| Included Features | Die cast aluminum construction, Powdercoat finish, 55% open area |
| Finish | Powder Coat Colors: Grey flek or crystal white. Other colors available for a set-up charge. |
| Compatibility | Compatible with most new and existing raised floor systems. Contact RLE to ensure a personalized fit. |
| Dimension and Weight | Imperial sizing only; 24" x 24" (610mm x 610mm); 18 lbs. (8.2 kg) |
| Load Rating | Available in 1250 lb (Imperial) These load ratings are static load ratings only. Please contact RLE for additional testing data. |

